

Order picking truck 1.8 -2.0 ton

BT optio

L-series

OSE200X

OSE180XP



Order picking truck

Truck specifications						OSE200X	OSE180XP
Identification	1.1	Manufacturer				Toyota	Toyota
	1.2	Model				OSE200X	OSE180XP
	1.3	Drive				Electric	Electric
	1.4	Operator type				Stand on	Stand on
	1.5	Load capacity/rated load	Q	kg		2000/1800 ¹⁾	1800
	1.6	Load centre	c	mm		1200/1400	1200/1400
	1.8	Load distance, back of fork to bogie wheel centre	x	mm		1485	1485
	1.9	Wheelbase, short/long chassis	y	mm		2690/2776	2690/2776
Weight	2.1	Service weight without battery, short/long chassis		kg		1201/1225	1291/1315
	2.2	Axle load, with load, drive/castor/fork wheels					
		short chassis		kg		780/836/943	780/836/943
		long chassis		kg		680/673/1144	680/673/1144
	2.3	Axle load, without load, drive/castor/fork wheels					
		short chassis		kg		597/500/339	597/500/339
Wheels	3.1	Drive/castor/fork wheels				Polyurethane	Polyurethane
	3.2	Wheel size, front		mm		Ø 250 x 92	Ø 250 x 92
	3.3	Wheel size, rear		mm		Ø 85 x 74	Ø 85 x 74
	3.4	Additional wheels (dimensions)		mm		Ø 150 x 78	Ø 150 x 78
	3.5	Wheels, number front/rear (x=driven wheels)		mm		1x+ 1/4	1x+ 1/4
Dimensions	4.2.1	Overall height	h_{15}	mm		1370	1370/2199
	4.4	Lift	h_3	mm		710	710
		Lift height	h_{23}	mm		800	800
	4.8	Stand height, min./max.	h_7	mm		138	138/980
	4.15	Height, fork lowered	h_{13}	mm		90	90
	4.19	Overall length, short/long chassis	l_1	mm		3784/3870	3784/3870
	4.20	Length to face of forks, short/long chassis	l_2	mm		1434/1520	1434/1520
	4.21	Overall width	b_1	mm		790	790
	4.22	Fork dimensions	s/e/l	mm		70/180/2350, 2850 ¹⁾	70/180/2350, 2850
	4.25	Width over forks	b_5	mm		550-570	550-570
	4.31	Ground clearance	m_1	mm		23	23
	4.34	Aisle width for pallets 800 x 1200 lengthways	A_{st}	mm		3819	3819
	4.35	Turning radius, short/long chassis	W_a	mm		2704/2790	2704/2790
	4.44	Clear width driver compartment entrance	l_{24}	mm		450	450
Performance data	5.1	Travel speed, with/without load ²⁾		km/h		8,5/12,0	7,0/12,0
	5.2	Lift speed, with/without load		m/s		0,07/0,12	0,07/0,12
	5.3	Lowering speed, with/without load		m/s		0,12/0,12	0,12/0,12
	5.8	Max. gradeability, with/without load ³⁾		%		5/5	5/5
	5.10	Service brake				Electromagnetic	Electromagnetic
Electric motor	6.1	Drive motor rating S2 60 min		kW		2,8	2,8
	6.2	Lift motor rating S3 7%		kW		2,0	2,0
	6.4	Battery voltage, nominal capacity K_5		V/Ah		24/620	24/620
	6.5	Battery weight, min./max.		kg		239-501	239-501
	6.6	Energy consumption acc to EN16796		kWh/h		0,43	0,43
Other	8.1	Type of drive control				BT Powerdrive	BT Powerdrive
	8.4	Sound level at the driver's ear according to EN12053		dB(A)		60	60

1) Fork length 2850 mm at LC 1400 mm gives 1800 kg capacity.


2) Values are for 620 Ah battery. Other batteries will give other values.

3) Measured according to company standard.

All data are based on table configuration. Other configurations may give other values.


Truck performance and dimensions are nominal and subject to tolerances.

Toyota Material Handling Manufacturing Sweden AB products and specifications are subject to change without notice.

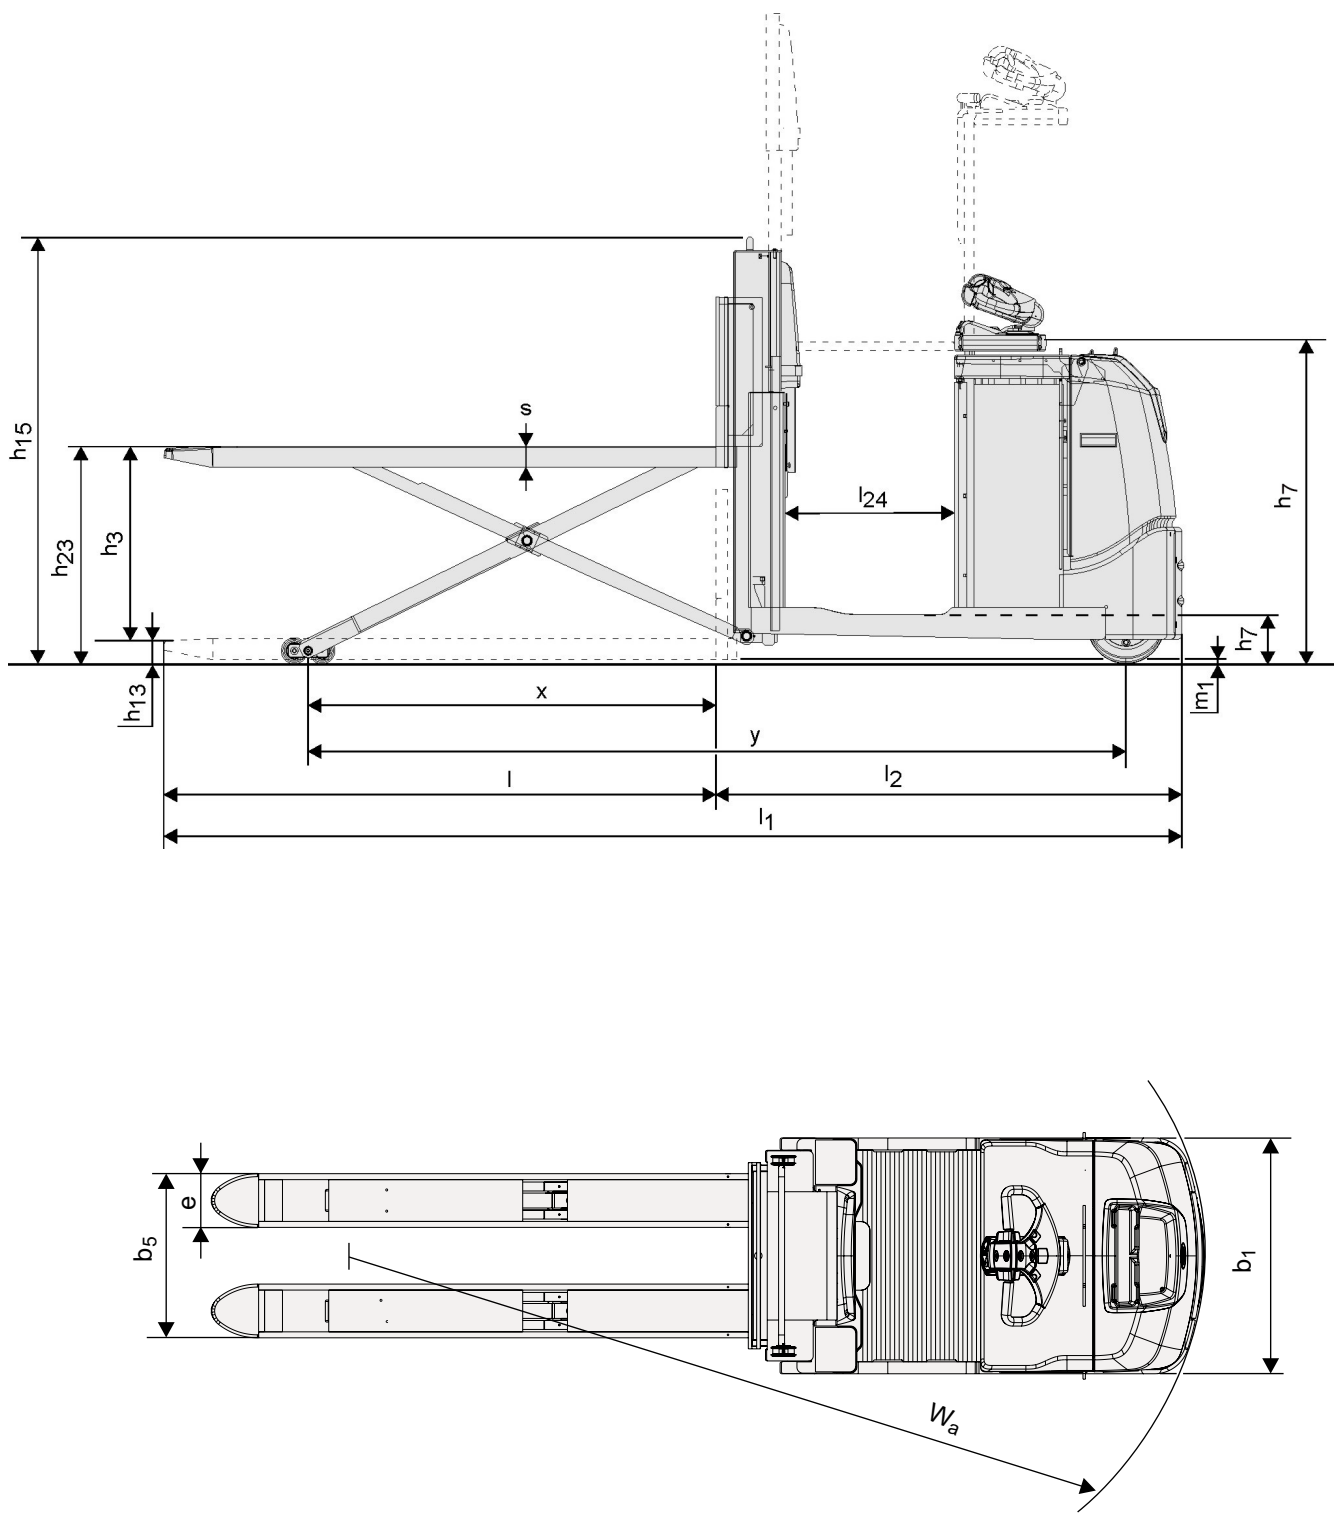

Truck features:

- High performance models
- High capacity, high lifting forks
- BT E-man steering concept
- Low step-in
- BT Powerdrive system
- Sensi-platform lift
 - including elevating controls (P-model)
- Integrated shrink film holder
- Streamlined administration
 - E-bar concept (option)
- Frequency adapted suspension (option)



TMHE-Toyota Material Handling Europe — 746575-040, version 10, 2024-04-09

TOYOTA

MATERIAL HANDLING