

Pedestrian stacker truck 2.0 ton



BT staxio

P-series

SPE200D

SPE200DN



Pedestrian stacker double stacking

Specifications					SPE200D	SPE200DN
Identification	1.1	Manufacturer			Toyota	Toyota
	1.2	Model			SPE200D	SPE200DN
	1.3	Drive			Electric	Electric
	1.4	Operator type			Stand on/pedestrian	Stand on/pedestrian
	1.5	Load capacity/rated load	Q	kg	1000	1000
		Double stacking capacity – fork/support arm capacity	Q	kg	1000 + 1000	800 + 1200
	1.6	Load center	c	mm	600	600
	1.8	Load distance, centre of support arm wheel to face of forks				
		raised support arms	x	mm	961	849
Weight		lowered support arms	x	mm	992	880
	1.9	Wheelbase				
		raised support arms	y	mm	1708	1608
Wheels		lowered support arms	y	mm	1739	1639
	2.1	Service weight incl. battery		kg	1243	1243
	2.2	Axle load, with load, drive/castor/fork wheel		kg	880/495/1868	830/545/1868
Dimensions	2.3	Axle load, without load, drive/castor/fork wheel		kg	440/461/342	420/481/342
	3.1	Drive/castor/fork wheel			Polyurethane	Polyurethane
	3.2	Wheel size, front		mm	Ø 230	Ø 230
	3.3	Wheel size, rear		mm	Ø 85	Ø 85
	3.4	Additional wheel size		mm	Ø 125	Ø 125
	3.5	Wheels, number front/rear (x = driven wheels)			1x+2/4	1x+2/4
	3.6	Track width, front	b ₁₀	mm	560	498
Performance data	3.7	Track width, rear	b ₁₁	mm	390	390
	4.2	Height, mast lowered	h ₁	mm	1793 *)	1593 *)
	4.3	Free lift	h ₂	mm	1356 *)	172 *)
	4.4	Lift	h ₃	mm	2410 *)	2010 *)
		Lift height	h ₂₃	mm	2500 *)	2100 *)
	4.5	Height, mast extended	h ₄	mm	3018 *)	2525 *)
	4.6	Initial Lift	h ₅	mm	120	120
	4.8	Stand height	h ₇	mm	190	190
	4.9	Height of tiller in drive position, min./max.				
		highest setting	h ₁₄	mm	1201/1413	1201/1413
		lowest setting	h ₁₄	mm	1101/1313	1101/1313
	4.15	Height, fork lowered	h ₁₃	mm	90	90
	4.19	Overall length				
		platform up	l ₁	mm	2165	2127
		platform down	l ₁	mm	2615	2577
	4.20	Length to face of forks				
		platform up	l ₂	mm	1015	977
		platform down	l ₂	mm	1465	1427
	4.21	Overall width	b ₁ /b ₂	mm	790/—	748/—
	4.22	Fork dimensions	s/e/l	mm	70/180/1200	70/180/1200
	4.25	Width over forks	b ₅	mm	570	570
	4.32	Ground clearance, center of wheelbase	m ₂	mm	19,5	19,5
Electric motor	4.33	Aisle width for pallets 1000x1200 crossways				
		platform up	A _{st}	mm	2783	2735
		platform down	A _{st}	mm	3252	3128
	4.34	Aisle width for pallets 800x1200 lengthways				
		platform up	A _{st}	mm	2620	2530
		platform down	A _{st}	mm	3089	2965
Others	4.35	Turning radius				
		platform up	W _a	mm	1954	1864
Performance data		platform down	W _a	mm	2423	2299
	5.1	Travel speed, with/without load		km/h	9,0/10,0	9,0/10,0
	5.2	Lift speed, with/without load		m/s	0,18/0,33	0,15/0,27
	5.3	Lowering speed, with/without load		m/s	0,45/0,45	0,45/0,35
	5.8	Max. gradeability, with/without load ¹⁾		%	8/12	8/12
	5.9	Acceleration time (over 10 m)		s	5,6	—
Electric motor	5.10	Service brake			Electromagnetic	Electromagnetic
	6.1	Drive motor rating (S2 60min)		kW	2,5	2,5
	6.2	Lift motor rating (S3 15%)		kW	3,0	2,2
	6.4	Battery voltage, nominal capacity K _s		V/Ah	24/300	24/300
	6.5	Battery weight		kg	195-270	195-270
	6.6	Energy consumption according to VDI cycle		kWh/h	0,88	0,75
Others		Energy consumption according to EN 16796		kWh/h	0,68	0,58
	8.1	Type of drive control			Variable AC	Variable AC
Performance data	8.4	Sound level at the driver's ear according to EN 12053		dB (A)	65	63

1) Measured according to company standard.

*) Further alternatives are available and will produce other values.

Data is based on standard configurations: h23 = 2500 mm (SPE200D) Duplex HiLo mast and 2100 mm (SPE200DN) Duplex Tele Panoramic View mast.

All data are based on table configuration. Other configurations may give other values

Truck performance and dimensions are nominal and subject to tolerances.

Toyota Material Handling products and specifications are subject to change without notice.



Battery dependent dimensions

Dimensions				SPE200D				SPE200DN			
				Lift out		Sideways		Lift out		Sideways	
				S	L*	S	L*	S	M	S	M
1.9	Wheelbase										
	raised support arms	y	mm	1708	1805	1708	1805	1608	1653	1608	1653
	lowered support arms	y	mm	1739	1836	1739	1836	1639	1687	1639	1687
4.19	Overall length										
	platform up	l_1	mm	2165	2262	2165	2262	2127	2175	2127	2175
	platform down	l_1	mm	2615	2712	2615	2712	2577	2625	2577	2625
4.20	Length to face of forks										
	platform up	l_2	mm	1015	1112	1015	1112	977	1025	977	1025
	platform down	l_2	mm	1465	1562	1465	1562	1427	1475	1427	1475
4.33	Aisle width for pallets 1000x1200 crossways										
	platform up	A_{st}	mm	2783	2880	2783	2880	2735	2783	2735	2783
	platform down	A_{st}	mm	3252	3349	3252	3349	3128	3177	3128	3177
4.34	Aisle width for pallets 800x1200 lengthways										
	platform up	A_{st}	mm	2620	2717	2620	2717	2530	2578	2530	2578
	platform down	A_{st}	mm	3089	3186	3089	3186	2965	3014	2965	3014
4.35	Turning radius										
	platform up	W_a	mm	1954	2051	1954	2051	1864	1912	1864	1912
	platform down	W_a	mm	2423	2520	2423	2520	2299	2348	2299	2348
6.4	Battery voltage, nominal capacity K_5		V/Ah	24/300	24/500	24/300	24/500	24/300	24/400	24/300	24/400
6.5	Battery weight, min.—max.		kg	195-310	345-405	195-310	345-405	195-310	345-405	195-310	345-405

* DIN battery will give same truck dimensions as for the large battery

Mast dimensions

Mast				Duplex Tele Panoramic View				Duplex HiLo	
SPE200D/DN	h_{23}	Lift height ($h_{13}+h_3$)	mm	1600	1750	1900	2100	2500	
	h_3	Lift	mm	1510	1660	1810	2010	2410	
	h_1	Height, mast lowered	mm	1343	1418	1483	1593	1793	
	h_4	Height, mast extended	mm	2118	2268	2408	2618	3018	
	h_2	Free lift	mm	172	172	172	172	1356	

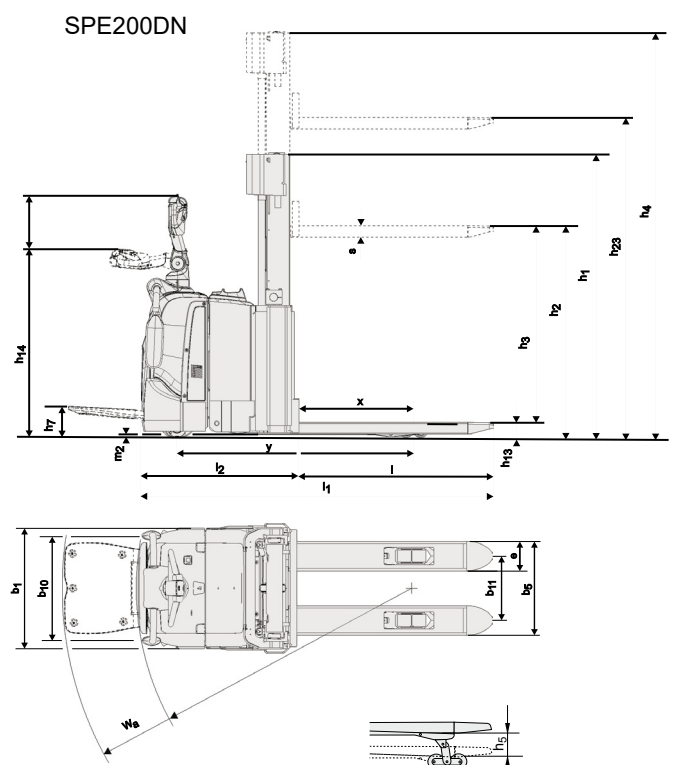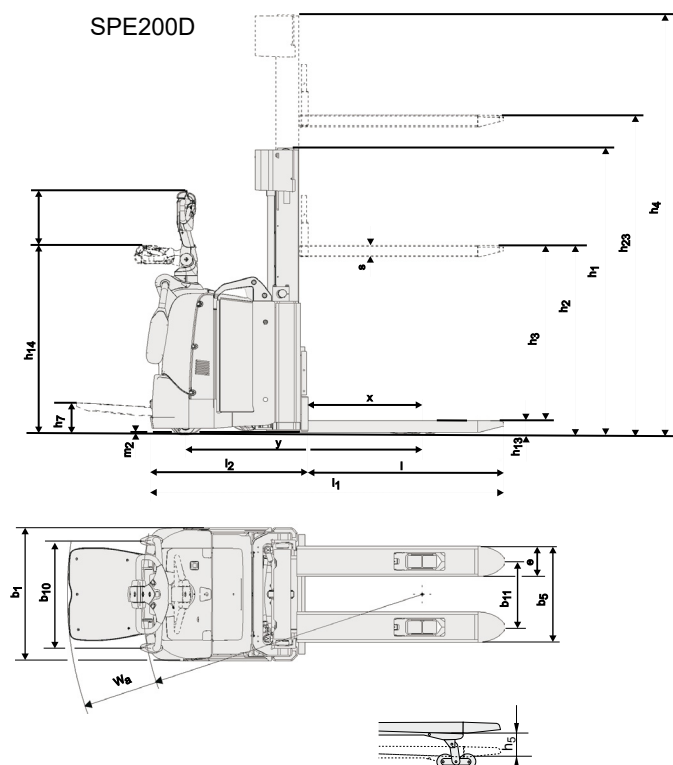

Truck features:

- BT Powertrak traction system
- Optimized Truck Performance
- Fingertip controls
- Electronic braking system
- Electronic speed control
- Operator safety
- Storage compartments
- Automatic switch-off
- Programmable performance
- Easy access for maintenance
- Sensilift
- Toyota I_site: truck fleet management system (option)
- Hydraulic oil for low temperatures (option)

